



ENERG

енергия · ενέργεια



Model Indoor unit
Outdoor unit

PKA-M50LA2-ET
PUZ-ZM35VKA2-ET

SEER



A+++

A++

A+

A

B

C

D

A++

kW 3,6

SEER 6,4

kWh/yil 196

SCOP



A+++

A++

A+

A

B

C

D

A+

kW X

2,4

X

SCOP X

4,0

X

kWh/yil X

839


X



60dB



65dB

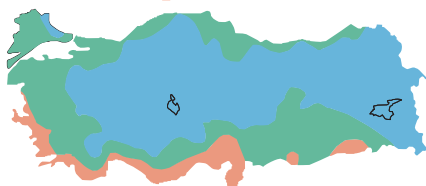

ENERGÍ · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

626/2011

PRODUCT INFORMATION (*)				
PACKAGED AIR CONDITIONER	INDOOR MODEL OUTDOOR MODEL	PKA-M50LA2-ET PUZ-ZM35VKA2-ET		
Function (indicate if present)		If function includes heating: Indicate the heating season the information relates to. Indicated values should relate to one heating season at a time. Include at least the heating season 'Average'.		
cooling	Y	Average (mandatory)	Y	
heating	Y	Warmer (if designated)	N	
		Colder (if designated)	N	
Item	symbol	value	unit	
Design load				
cooling	Pdesignc	3.6	kW	
heating/Average	Pdesignh	2.4	kW	
heating/Warmer	Pdesignh	x	kW	
heating/Colder	Pdesignh	x	kW	
Declared capacity for cooling, at indoor temperature 27(19)°C and outdoor temperature Tj				
Tj=35°C	Pdc	3.60	kW	
Tj=30°C	Pdc	2.70	kW	
Tj=25°C	Pdc	1.90	kW	
Tj=20°C	Pdc	1.90	kW	
Declared capacity for heating/Average season, at indoor temperature 20°C and outdoor temperature Tj				
Tj=-7°C	Pdh	2.10	kW	
Tj=2°C	Pdh	1.30	kW	
Tj=7°C	Pdh	1.25	kW	
Tj=12°C	Pdh	1.40	kW	
Tj=bivalent temperature	Pdh	2.40	kW	
Tj=operating limit	Pdh	2.20	kW	
Declared capacity for heating/Warmer season, at indoor temperature 20°C and outdoor temperature Tj				
Tj=2°C	Pdh	x	kW	
Tj=7°C	Pdh	x	kW	
Tj=12°C	Pdh	x	kW	
Tj=bivalent temperature	Pdh	x	kW	
Tj=operating limit	Pdh	x	kW	
Declared capacity for heating/Colder season, at indoor temperature 20°C and outdoor temperature Tj				
Tj=-7°C	Pdh	x	kW	
Tj=2°C	Pdh	x	kW	
Tj=7°C	Pdh	x	kW	
Tj=12°C	Pdh	x	kW	
Tj=bivalent temperature	Pdh	x	kW	
Tj=operating limit	Pdh	x	kW	
Tj=-15°C	Pdh	x	kW	
Bivalent temperature				
heating/Average	Tbiv	-10	°C	
heating/Warmer	Tbiv	x	°C	
heating/Colder	Tbiv	x	°C	
Cycling interval capacity				
for cooling	Pcycc	x	kW	
for heating	Pcyh	x	kW	
Degradation co-efficient cooling	Cdc	0.25	-	
Electric power input in power modes other than 'active mode'				
off mode	POFF	17	W	
standby mode	PSB	17	W	
thermostat - off mode	PTO(c/h)	7 / 27	W	
crankcase heater mode	PCK	0	W	
Capacity control (indicate one of three options)				
fixed	N			
staged	N			
variable	Y			
Contact details for obtaining more information				
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan E-mail: melshierp@MitsubishiElectric.co.jp				
If function includes heating: Indicate the heating season the information relates to. Indicated values should relate to one heating season at a time. Include at least the heating season 'Average'.				
Average (mandatory)		Y		
Warmer (if designated)		N		
Colder (if designated)		N		
Item	symbol	value	unit	
Seasonal efficiency				
cooling	SEER	6.4	-	
heating/Average	SCOP/A	4.0	-	
heating/Warmer	SCOP/W	x	-	
heating/Colder	SCOP/C	x	-	
Declared energy efficiency ratio, at indoor temperature 27(19)°C and outdoor temperature Tj				
Tj=35°C	EERd	4.30	-	
Tj=30°C	EERd	6.40	-	
Tj=25°C	EERd	9.40	-	
Tj=20°C	EERd	12.00	-	
Declared coefficient of performance/Average season, at indoor temperature 20°C and outdoor temperature Tj				
Tj=-7°C	COPd	2.60	-	
Tj=2°C	COPd	4.20	-	
Tj=7°C	COPd	5.10	-	
Tj=12°C	COPd	6.40	-	
Tj=bivalent temperature	COPd	2.10	-	
Tj=operating limit	COPd	2.00	-	
Declared coefficient of performance/Warmer season, at indoor temperature 20°C and outdoor temperature Tj				
Tj=2°C	COPd	x	-	
Tj=7°C	COPd	x	-	
Tj=12°C	COPd	x	-	
Tj=bivalent temperature	COPd	x	-	
Tj=operating limit	COPd	x	-	
Declared coefficient of performance/Colder season, at indoor temperature 20°C and outdoor temperature Tj				
Tj=-7°C	COPd	x	-	
Tj=2°C	COPd	x	-	
Tj=7°C	COPd	x	-	
Tj=12°C	COPd	x	-	
Tj=bivalent temperature	COPd	x	-	
Tj=operating limit	COPd	x	-	
Tj=-15°C	COPd	x	-	
Operating limit temperature				
heating/Average	Tol	-11	°C	
heating/Warmer	Tol	x	°C	
heating/Colder	Tol	x	°C	
Cycling interval efficiency				
for cooling	EERcyc	x	-	
for heating	COPcyc	x	-	
Degradation co-efficient heating	Cdh	0.25	-	
Annual electricity consumption				
cooling	QCE	196	kWh/a	
heating/Average	QHE	839	kWh/a	
heating/Warmer	QHE	x	kWh/a	
heating/Colder	QHE	x	kWh/a	
Other items				
Sound power level (indoor/outdoor)	LWA	60 / 65	dB(A)	
Global warming potential	GWP	550	kgCO2eq.	
Rated air flow (indoor/outdoor)	-	708 / 2700	m3/h	

(*) This information is based on the "product information requirement" in COMMISSION REGULATION (EU) No206/2012.

TECHNICAL DOCUMENTATION (¹)			
PACKAGED AIR CONDITIONER	INDOOR MODEL	PKA-M50LA2-ET	299H898W237D (mm)
	OUTDOOR MODEL	PUZ-ZM35VKA2-ET	630H809W300D (mm)
Function			
	cooling		Y
	heating		Y
The heating season			
	Average (mandatory)		Y
	Warmer (if designated)		N
	Colder (if designated)		N
Capacity control			
	fixed		N
	staged		N
	variable		Y
Item symbol value unit			
Seasonal efficiency (²)			
	cooling	SEER	6.4 -
	heating/Average	SCOP/A	4.0 -
	heating/Warmer	SCOP/W	x -
	heating/Colder	SCOP/C	x -
Energy efficiency class			
	cooling	SEER	A++ -
	heating/Average	SCOP/A	A+ -
	heating/Warmer	SCOP/W	x -
	heating/Colder	SCOP/C	x -
Other items			
	Sound power level (indoor/outdoor)	LWA	60 / 65 dB(A)
	Refrigerant	-	R32 -
	Global warming potential	GWP	550 kgCO2eq.
identification and signature of the person empowered to bind the supplier	Kengo Takahashi Kengo Takahashi Manager, Packaged Air Conditioners Development Test Section MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS		

(1) This information is based on COMMISSION DELEGATED REGULATION (EU)No626/2011.

(2) SEER/SCOP values are measured based on FprEN 14825:2016: Testing and rating at part load conditions and calculation of seasonal performance.