


For Turkey
Türkiye için

BH79J527H03

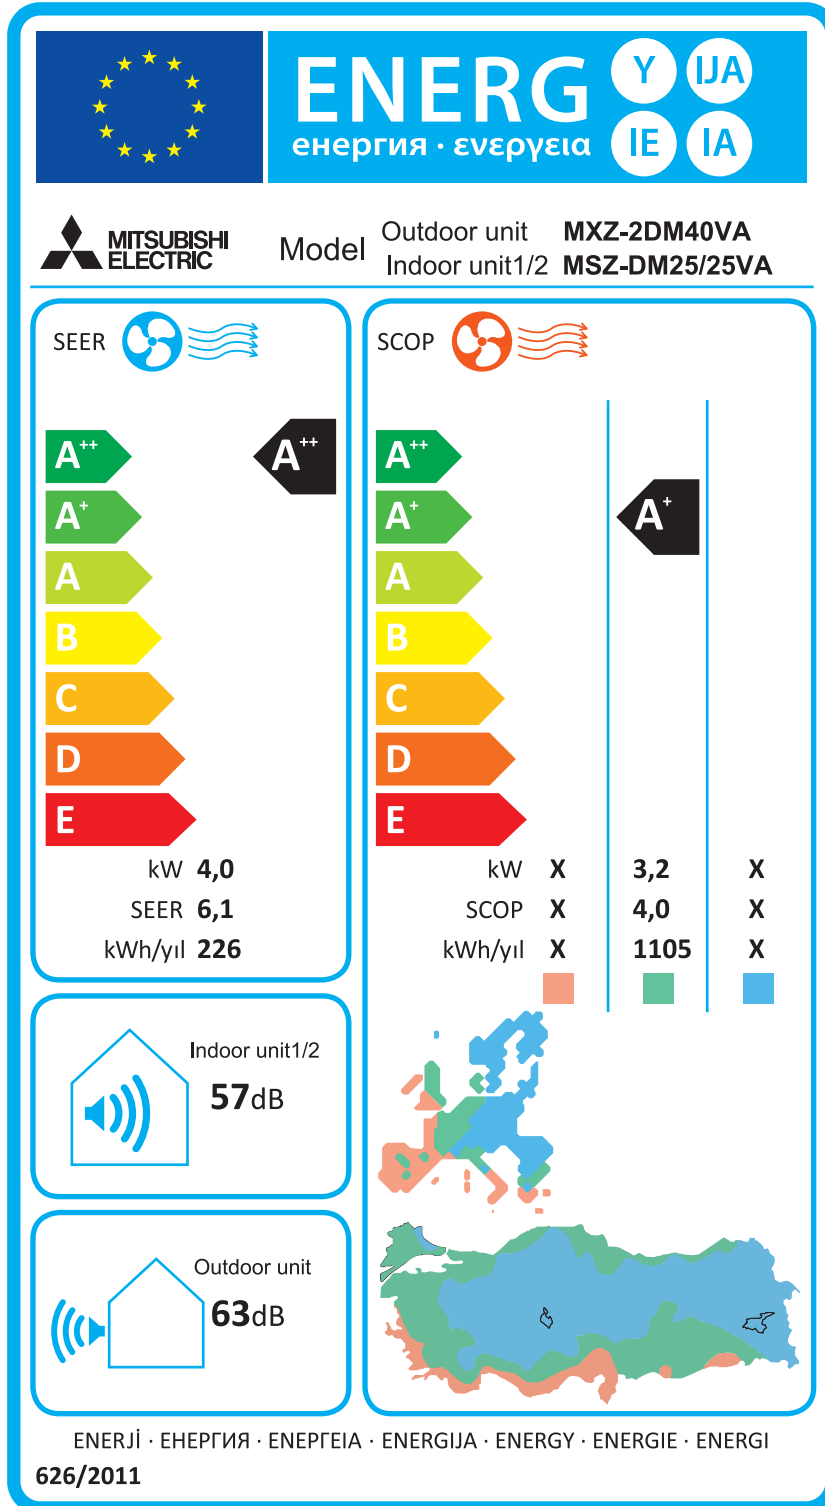

PRODUCT INFORMATION (*)										
ROOM AIR CONDITIONER		INDOOR MODEL 1/2/3 INDOOR MODEL 4/5/6 OUTDOOR MODEL	MSZ-DM25VA / MSZ-DM25VA / - - / - / - MXZ-2DM40VA							
Function (indicate if present)		If function includes heating: Indicate the heating season the information relates to. Indicated values should relate to one heating season at a time. Include at least the heating season <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Average (mandatory)</td> <td style="width: 50%;">Y</td> </tr> <tr> <td>Warmer (if designated)</td> <td>N</td> </tr> <tr> <td>Colder (if designated)</td> <td>N</td> </tr> </table>			Average (mandatory)	Y	Warmer (if designated)	N	Colder (if designated)	N
Average (mandatory)	Y									
Warmer (if designated)	N									
Colder (if designated)	N									
cooling	Y									
heating	Y									
Item	symbol	value	unit							
Design load										
cooling	Pdesignc	4.0	kW							
heating/Average	Pdesignh	3.2	kW							
heating/Warmer	Pdesignh	x	kW							
heating/Colder	Pdesignh	x	kW							
Declared capacity for cooling, at indoor temperature 27(19)°C and outdoor temperature Tj										
Tj=35°C	Pdc	4.00	kW							
Tj=30°C	Pdc	3.01	kW							
Tj=25°C	Pdc	2.78	kW							
Tj=20°C	Pdc	2.88	kW							
Declared capacity for heating/Average season, at indoor temperature 20°C and outdoor temperature Tj										
Tj=-7°C	Pdh	3.01	kW							
Tj=2°C	Pdh	2.11	kW							
Tj=7°C	Pdh	2.03	kW							
Tj=12°C	Pdh	2.34	kW							
Tj=bivalent temperature	Pdh	3.01	kW							
Tj=operating limit	Pdh	2.27	kW							
Declared capacity for heating/Warmer season, at indoor temperature 20°C and outdoor temperature Tj										
Tj=2°C	Pdh	x	kW							
Tj=7°C	Pdh	x	kW							
Tj=12°C	Pdh	x	kW							
Tj=bivalent temperature	Pdh	x	kW							
Tj=operating limit	Pdh	x	kW							
Declared capacity for heating/Colder season, at indoor temperature 20°C and outdoor temperature Tj										
Tj=-7°C	Pdh	x	kW							
Tj=2°C	Pdh	x	kW							
Tj=7°C	Pdh	x	kW							
Tj=12°C	Pdh	x	kW							
Tj=bivalent temperature	Pdh	x	kW							
Tj=operating limit	Pdh	x	kW							
Tj=-15°C	Pdh	x	kW							
Bivalent temperature										
heating/Average	Tbiv	-7	°C							
heating/Warmer	Tbiv	x	°C							
heating/Colder	Tbiv	x	°C							
Cycling interval capacity										
for cooling	Pcycc	x	kW							
for heating	Pcyh	x	kW							
Degradation co-efficient	Cdc	0,25	-							
Electric power input in power modes other than 'active mode'										
off mode	POFF	7	W							
standby mode	PSB	7	W							
thermostat - off mode	PTO	5	W							
crankcase heater mode	PCK	0	W							
Capacity control (indicate one of three options)										
fixed	N									
staged	N									
variable	Y									
Contact details for obtaining more information										
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS 3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan E-mail: melshierp@nb.MitsubishiElectric.co.jp										

(*) This information is based on the "product information requirement" in COMMISSION REGULATION (EU) No206/2012,

TECHNICAL DOCUMENTATION (1)			
ROOM AIR CONDITIONER	INDOOR MODEL 1	MSZ-DM25VA	290H799W232D (mm)
	INDOOR MODEL 2	MSZ-DM25VA	290H799W232D (mm)
	INDOOR MODEL 3	-	-
	INDOOR MODEL 4	-	-
	INDOOR MODEL 5	-	-
	INDOOR MODEL 6	-	-
	OUTDOOR MODEL	MXZ-2DM40VA	550H800W285D (mm)
Function			
cooling		Y	
heating		Y	
The heating season			
Average (mandatory)		Y	
Warmer (if designated)		N	
Colder (if designated)		N	
Capacity control			
fixed		N	
staged		N	
variable		Y	
Item	symbol	value	unit
Seasonal efficiency (2)			
cooling	SEER	6.1	-
heating/Average	SCOP/A	4.0	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-
Energy efficiency class			
cooling	SEER	A++	-
heating/Average	SCOP/A	A+	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-
Other items			
Sound power level (indoor1,2/outdoor)	LWA	57,57/63	dB(A)
Refrigerant	-	R410A	-
Global warming potential	GWP	1975	kgCO2eq,
identification and signature of the person empowered to bind the supplier	 Tomoyuki Miwa Department Manager, Quality Assurance Department MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO.,LTD.		

(1) This information is based on COMMISSION DELEGATED REGULATION (EU)No626/2011,

(2) SEER/SCOP values are measured based on FprEN 14825:2011: Testing and rating at part load conditions and calculation of seasonal performar