



ENERG

енергия · ενέργεια

Y
IJA
IE
IA

MITSUBISHI
ELECTRIC

Model

Indoor unit
Outdoor unit

PLA-M60EA
SUZ-KA60VA6

SEER



A+++

A++

A+

A

B

C

D

A++

SCOP



A+++

A++

A+

A

B

C

D

A+

kW 5,7

SEER 6,5

kWh/yıl 307

kW X

SCOP X

kWh/yıl X

4,6

4,3

1498

X

X


X



54dB



65dB

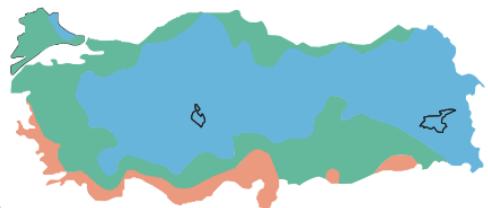

ENERJİ · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

626/2011

Ⓐ	Model	Ⓑ Indoor unit	PLA-M35EA	PLA-M50EA	PLA-M60EA	PLA-M71EA
		Ⓒ Outdoor unit	SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6	SUZ-KA71VA6
Ⓓ	Sound power levels on cooling mode	Ⓔ Inside dB	51	54	54	56
		Ⓕ Outside dB	62	65	65	69
Ⓔ	Refrigerant		R410A GWP 1975 *1			
Ⓗ	Cooling	SEER	6,9	6,5	6,5	6,2
		ⓘ Energy efficiency class	A++	A++	A++	A++
Ⓜ	Heating (Average season)	Ⓛ Annual electricity consumption *2 kWh/a	181	295	307	400
		Ⓜ Design load kW	3,6	5,5	5,7	7,1
		SCOP	4,4	4,0	4,3	4,3
		ⓘ Energy efficiency class	A+	A+	A+	A+
		Ⓛ Annual electricity consumption *2 kWh/a	826	1505	1498	1888
Ⓜ	Design load kW	Ⓜ Design load kW	2,6	4,3	4,6	5,8
		(at reference design temperature) kW	2,3 (-10°C)	3,8 (-10°C)	4,0 (-10°C)	4,7 (-10°C)
		(at bivalent temperature) kW	2,3 (-7°C)	3,8 (-7°C)	4,1 (-7°C)	5,1 (-7°C)
		(at operation limit temperature) kW	2,3 (-10°C)	3,8 (-10°C)	4,0 (-10°C)	4,7 (-10°C)
		Ⓣ Back up heating capacity kW	0,3	0,5	0,6	1,1

Deutsch	Italiano	Svenska	Polski	Eesti	Malti	Русский
Français	Ελληνικά	Česky	Slovensko	Gaeilge	Suomi	Norsk
Nederlands	Português	Slovensky	Български	Latviski	Türkçe	Українська
Español	Dansk	Magyar	Română	Lietuvių k.	Hrvatski	
Model	Modello	Modell	Model	Model	Model	Модель
Modèle	Модéло	Model	Model	Déanamh	Malli	Модell
Model	Modelo	Model	Model	Modelis	Model	Модель
Modelo	Model	Model	Model	Modelis	Model	Модель
Innengerät	Unità interna	Inomhusenhet	Jednostka wewnętrzna	Siseseade	Unità għal ġewwa	Внутренний прибор
Appareil intérieur	Εσωτερική μονάδα	Vnitřní jednotka	Notranja enota	Aonad laistigh	Sisáksikkó	Innendørsenhet
Binnenunit	Unidade interior	Vnútorná jednotka	Вътрешно тяло	Iekštelpu ierīce	İç ünite	Внутрішній блок
Unidad interior	Indendørsenhet	Beltéri egység	Unitate de interior	Patalpoje montuojamas irenginys	Unutarnja jedinica	
Außengerät	Unità esterna	Utomhusenhet	Jednostka zewnętrzna	Välisseade	Unità għal barra	Наружный прибор
Modèle extérieur	Εξωτερική μονάδα	Vnější jednotka	Zunanja enota	Aonad lasmuigh	Ulkoysikkö	Utendørsenhet
Buitenunit	Unidade exterior	Vonkajšia jednotka	Външно тяло	Ārtelpas ierīce	Diş ünite	Зовнішній блок
Unidad exterior	Udendørsenhet	Kültéri egység	Unitate de exterior	Lauke montuojamas irenginys	Vanjska jedinica	
Schalleistungspegel im Kühlmodus	Livelli di potenza sonora in modalità di raffreddamento	Bullernivå i nedkylningsläget	Poziom moczy dźwięku w trybie chłodzenia	Mūratasemed jahutusrežiimis	Livelli tal-qawwa tal-hsejjes fil-modalità tat-kessieħ	Значения уровня звуковой мощности в режиме охлаждения
Niveaux de puissance corrects en mode de refroidissement	Επίπεδα ισχύος ρήχου στην κατάσταση ψύξης	Úrovň hlučnosti v režimu chlazení	Ravni zvočne moči v načinu hlajenja	Leibhéil chumhacha fuaime ar mhodh fuaralhe	Äänenvoimakkuustasot viilenystillassa	Lydrykknivär i avkjölingsmodus
Geluidsniveaus in koelstand	Níveis de potência sonora em modo de arrefecimento	Hladiny akustického výkonu v režime chladenia	Нива на звуковата мощност в режим на охлаждане	Akustiskās jaudas līmenis dzesēšanas režīmā	Soğutma modunda ses güç düzeyleri	Рівні звукової потужності у режимі охолодження
Niveles de potencia del sonido en el modo de refrigeración	Lydstyrkeniveauer i kølefunktion	Hangnyomásszintek hűtés üzem-módban	Nivel sonor în modul de răcire	Garso galios lygis vésinimo režimu	Razine zvučnog tlaka pri hlađenju	
Innen	Interno	Insida	Wewnätrz	Sees	Gewwa	Внутри
À l'intérieur	Εσωτερικό	Uvnitř	Znotraj	Laistigh	Sisäpuoli	Innwendig
Binnenkant	Interior	Vo vnútri	Вътре	Iekštelpās	İç taraf	Усередині
Interior	Indvendig	Bent	Interior	Vidinis	Unutra	
Außen	Externo	Utsida	Na zewnätrz	Väljas	Barra	Снаружи
À l'extérieur	Εξωτερικό	Venu	Zunaj	Lasmuigh	Ulkopuoli	Utwendig
Buitenkant	Exterior	Vonku	На открыто	Ārtelpā	Diş taraf	Назовні
Exterior	Udvendig	A szabadban	Exterior	İsorinis	Vani	
Kühlmittel	Refrigerante	Köldmedel	Czynnik chłodniczy	Külmutsagens	Refrigerant	Хладагент
Réfrigérant	Ψυκτικό	Chladivo	Hladilno sredstvo	Cuisnéan	Kylmääine	Kjølemedium
Koelmiddel	Refrigerante	Chladivo	Xladilen agent	Aukstumaģents	Soğutucu	Холодаагент
Refrigerante	Kølemiddel	Hütöközeg	Refrigerent	Šaldalas	Rashladno sredstvo	

Deutsch	Italiano	Svenska	Polski	Eesti	Malti	Русский
Français	Ελληνικά	Česky	Slovensko	Gaeilge	Suomi	Norsk
Nederlands	Português	Slovensky	Български	Latviski	Türkçe	Українська
Español	Dansk	Magyar	Română	Lietuvių k.	Hrvatski	
Kühlen	Raffreddamento	Kyla	Chłodzenie	Jahutus	Tkessiħ	Охлаждение
Refroidissement	Ψύξη	Chlazení	Hlajenie	Fuarú	Vilennys	Avkjøling
Koelen	Arrefecimento	Chladenie	Oxhlađanje	Dzesēšana	Soğutma	Охолодження
Refrigeración	Köling	Hűtés	Răcire	Vésinimas	Hlađenje	
Energieeffizienzklasse	Classe di efficienza energetica	Energiklass	Klasa energetyczna	Energiatħosħuse klass	Klassi tal-effiċjenza fl-użu tal-enerġija	Класс эффективности использования энергии
Classe d'efficacité énergétique	Κλάση ενέργειακής απόδοσης	Třída energetické účinnosti	Razred energetiske učinkovitosti	Aicme ēifeachtulachha fuinnimh	Energiatehokkuusluokka	Energieeffektivitetsklasse
Energie-efficiëntiekklasse	Classe de eficiència energética	Trieda energetickej účinnosti	Klasc na energetyna efektywnost	Energoefektyvitātes klase	Enerji verimlilik sıñi	Клас ефективності енергоспоживання
Clase de eficiencia energética	Energieeffektivitetsklasse	Energiahátekonyásig osztály	Clasă de eficiență energetică	Energijs vartojimo efektyvumo klasė	Klasa energetiske učinkovitosti	
Jahresstromverbrauch *2	Consumo annuale di energia elettrica *2	Årlig strömforbrukning *2	Zużycie prądu w skali roku *2	Aastane voolutarbirbus *2	Konsum annwali tal-elettriku *2	Годовое потребление электроэнергии *2
Consommation d'électricité annuelle *2	Ετήσια κατανάλωση πεύματος *2	Roční spotřeba elektrické energie *2	Letna poraba elektrike *2	Ídiu leictreachais bhliantúl *2	Vuotuinen sähkökulutus *2	Årlig strømforbruk *2
Jaarlijks elektriciteitsverbruik *2	Consumo anual de electricidadade *2	Ročná spotreba elektriny *2	Годишка консумация на електроенергия *2	Gada elektroenerģijas patēriņš *2	Yıllık elektrik tüketimi *2	Річне споживання електроенергії *2
Consumo anual de electricidad *2	Arligt elforbrug *2	Éves áramfogyasztás *2	Consum anual de electricitate *2	Metinis elektros energijos suvarojimas *2	Godišnja potrošnja električne energije *2	
Lastauslegung	Carico nominale	Dimensionerande belastning	Maksymalne obciążenie	Projekteeritud koormus	Tagħbija tad-disinn	Расчетная нагрузка
Charge de calcul	Σχεδιασμός, φόρτωσης	Jmenovité zatížení	Nazivna obremenitev	Lód deartha	Laskettu kuormitus	Uformningsbelastning
Ontwerpbelasting	Carga nominal	Projektované zaťaženie	Проектен товар	Aprēķina slodze	Tasarım yükü	Розрахункове навантаження
Carga de diseño	Brugslast	Méretezési terhelés	Sarcină nominală	Projektinė apkrova	Težina uređaja	
Heizen (Jahresdurchschnitt / wärmeres Wetter)	Riscaldamento (Stagione media / calda)	Värme (Genomsnittlig/varmare årsid)	Ogrzewanie (Sezon umiarkowany/ciepły)	Kütmine (keskmene/soojaperiood)	Tishin (Staġun Medju / Aktar Shun)	Харрев (средний/теплый сезон)
Chauffage (moyenne saison / saison chaude)	Θέρμανση (Εποχή με μέσες / υψηλότερες θερμοκρασίες)	Topení (průměrná/teplá sezóna)	Ogrevanje (Povprečni/toplejši letni čas)	Téamh (Séasúr Meánach / Níos teo)	Lämmitys (Normaal / Lämpimämpi kausi)	Oppvarming (gjennomsnittlig / varmere årsid)
Verwärmen (gemiddeld / warmer seizoen)	Aquecimento (Média estação / estação mais quente)	Vykurovanie (Priemerné/teplejšie obdobie)	Отопление (Средно / Топъл сезон)	Sildišana (Vidēji siltā/siltā gadalaikā)	İsıtma (Ortalama / İlik mevsim)	Опалення (у середній/теплий сезон)
Calefacción (Promedio / temperatura más cálida)	Varme (gennemsnittlig/varmre sæson)	Fűtés (Átlagos/meleg évszak)	Încălzire (Anotimp normal/mai cald)	Šildymas (vidutinis / šiltuoju sezonu)	Zagrijavanje (Prosječ / toplica sezona)	
Nennkapazität	Capacità dichiarata	Deklarerad kapacitet	Deklarowana pojemność	Deklareritudo vőimsus	Kapaċità ddikjarata	Гарантированная мощность
Capacité déclarée	Δηλωμένη χωρητικότητα	Udávaná kapacita	Prijavljena zmogljivost	Toileadħi fógartha	Ilmoitettu teho	Erklært kapasitet
Aangegeven capaciteit	Capacidade declarada	Deklarovaný výkon	Обявена мощност	Deklarētā jauda	Beyan edilen kapasite	Гарантована потужність
Capacidad declarada	Erkläret kapacitet	Névleges teljesítmény	Capacitate declarată	Deklaruotas pajęgumas	Deklarirani kapacitet	
bei angegebener Referenztemperatur	alla temperatura di progetto di riferimento	vid dimensionerande referenstemperatur	w znamionowej temperaturze odniesienia	projekteerimise vörðlustemperatuuri juures	f'temperatura tad-disinn ta' referenza	при эталонной расчетной температуре
à la température de calcul de référence	σε θερμοκρασία σχεδιασμού αναφοράς	při referenční výpočtové teplotě	ob referenční nazivní temperaturi	ag teocht deartha tagartha	perusmittoituslämpötilassa	ved referansetemperatur for utforming
bij referentieontwerptemperatuur	à températura nominal de referência	pri referenčnej výpočtové teplotě	pri izčislitelna projektna temperatúra	aprēķina references temperatūrā	referans tasaram sicaklığında	При етапной розрахунковій температурі
a temperatura de diseño de referencia	ved brugsafhængig referencetemperatur	tervezési referencia-hőmérsékleten	la temperatura de referință nominală	esant norminei projektinei temperatură	pri referentnoj temperaturi	
bei bivalenter Temperatur	alla temperaturla bivalente	vid bivalent temperatur	w temperaturze biwalentnej	bivalentse temperatuuri juures	f'temperatura bivalenti	при бивалентной температуре

PRODUCT INFORMATION (*)

PACKAGED AIR CONDITIONER	INDOOR MODEL OUTDOOR MODEL	PLA-M60EA SUZ-KA60VA6	
Function (indicate if present)		If function includes heating: Indicate the heating season the information relates to. Indicated values should relate to one heating season at a time. Include at least the heating season	
cooling	Y	Average (mandatory)	
heating	Y	Warmer (if designated)	
		Colder (if designated)	
Item	symbol	value	unit
Design load		Seasonal efficiency	
cooling	Pdesignc	5.7	kW
heating/Average	Pdesignh	4.6	kW
heating/Warmer	Pdesignh	x	kW
heating/Colder	Pdesignh	x	kW
Declared capacity for cooling, at indoor temperature 27(19)°C and outdoor temperature Tj		Declared energy efficiency ratio, at indoor temperature 27(19) °C and outdoor temperature Tj	
Tj=35°C	Pdc	5.7	kW
Tj=30°C	Pdc	4.2	kW
Tj=25°C	Pdc	3.0	kW
Tj=20°C	Pdc	2.7	kW
Declared capacity for heating/Average season, at indoor temperature 20°C and outdoor temperature Tj		Declared coefficient of performance/Average season, at indoor temperature 20°C and outdoor temperature Tj	
Tj=-7°C	Pdh	4.1	kW
Tj=2°C	Pdh	2.6	kW
Tj=7°C	Pdh	2.3	kW
Tj=12°C	Pdh	2.7	kW
Tj=bivalent temperature	Pdh	4.1	kW
Tj=operating limit	Pdh	4.0	kW
Declared capacity for heating/Warmer season, at indoor temperature 20°C and outdoor temperature Tj		Declared coefficient of performance/Warmer season, at indoor temperature 20°C and outdoor temperature Tj	
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW
Declared capacity for heating/Colder season, at indoor temperature 20°C and outdoor temperature Tj		Declared coefficient of performance/Colder season, at indoor temperature 20°C and outdoor temperature Tj	
Tj=-7°C	Pdh	x	kW
Tj=2°C	Pdh	x	kW
Tj=7°C	Pdh	x	kW
Tj=12°C	Pdh	x	kW
Tj=bivalent temperature	Pdh	x	kW
Tj=operating limit	Pdh	x	kW
Tj=-15°C	Pdh	x	kW
Bivalent temperature		Operating limit temperature	
heating/Average	Tbiv	-7	°C
heating/Warmer	Tbiv	x	°C
heating/Colder	Tbiv	x	°C
Cycling interval capacity		Cycling interval efficiency	
for cooling	Pcycc	x	kW
for heating	Pcych	x	kW
Degradation co-efficient cooling	Cdc	0.25	-
Degradation co-efficient heating	Cdh	0.25	-
Electric power input in power modes other than 'active mode'		Annual electricity consumption	
off mode	POFF	9	W
standby mode	PSB	9	W
thermostat - off mode	PTO(c/h)	3/7	W
crankcase heater mode	PCK	0	W
Capacity control (indicate one of three options)		Other items	
fixed	N	Sound power level (indoor/outdoor)	LWA
staged	N	Global warming potential	GWP
variable	Y	Rated air flow (indoor/outdoor)	m3/h
Contact details for obtaining more information	Name and address of the manufacturer or of its authorized representative.		

(*) This information is based on the "product information requirement" in COMMISSION REGULATION (EU) No206/2012.

TECHNICAL DOCUMENTATION (¹)

PACKAGED AIR CONDITIONER	INDOOR MODEL OUTDOOR MODEL	PLA-M60EA SUZ-KA60VA6	258H840W840D (mm) 880H840W330D (mm)
--------------------------	-------------------------------	--------------------------	--

Function	
cooling	Y
heating	Y

The heating season	
Average (mandatory)	Y
Warmer (if designated)	N
Colder (if designated)	N

Capacity control	
fixed	N
staged	N
variable	Y

Item	symbol	value	unit
Seasonal efficiency (²)			
cooling	SEER	6.5	-
heating/Average	SCOP/A	4.3	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Energy efficiency class			
cooling	SEER	A++	-
heating/Average	SCOP/A	A+	-
heating/Warmer	SCOP/W	x	-
heating/Colder	SCOP/C	x	-

Other items			
Sound power level (indoor/outdoor)	LWA	54/65	dB(A)
Refrigerant	-	R410A	-
Global warming potential	GWP	1975	kgCO2eq.

identification and signature of the person empowered to bind the supplier	 Akira Hidaka Department Manager, Quality Assurance Department MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO.,LTD
---	---

(1) This information is based on COMMISSION DELEGATED REGULATION (EU)No626/2011.

(2) SEER/SCOP values are measured based on FprEN 14825:2011: Testing and rating at part load conditions and calculation of seasonal performance.